


CARVING WALLPAPER

A realistic emulation of beautiful floral patterns that are imbibed with more life with a carving effect impressed on the durable 600x600 surface makes the "carving wallpaper collection" a highly soughtafter choice. A carefully curated selection that can meet the design needs of a diverse customer base and has everything you need to unleash your creativity! If you want your scheme to bloom like a divine flower valley, this collection is your way to go!



RESIDENTIAL SPACE

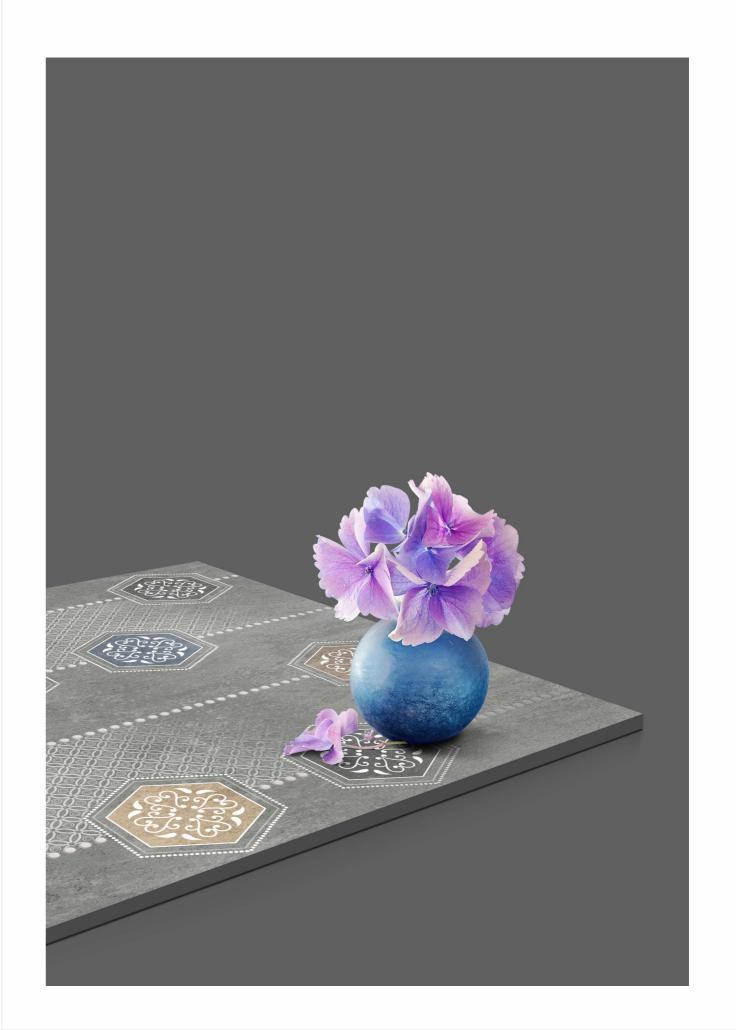









Applicable in both domestic and commercial themes, this collection is versatile and easy to maintain. As durable as it is aesthetic, these statement pieces will adorn your walls for a very long period without fading.



COMMERCIAL SPACE









FEATURES



Hygienic Surface





Easy to

Fire

Resistance



Chemical

Resistance




Frost Resistance

Easy

Installation















Thermal Shock Resistance



Crazing Resistance



ACUARELA





ADRIAN MINT






TILE SIZE 60X60CM

SURFACE CARVING FINISH

AMALFI

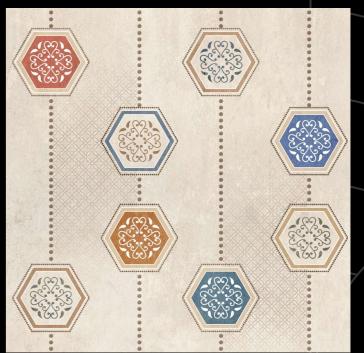



CHILLBERRY





DELIGHT FLOWER






TILE SIZE 60X60CM

SURFACE CARVING FINISH

FIRE BALL

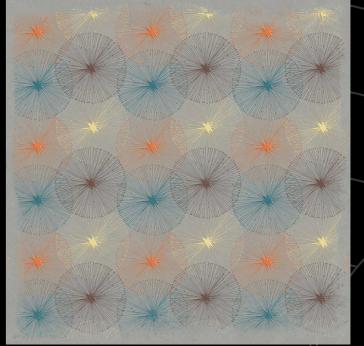



HEAVEN BELLY





LEON VINTAGE





MILAS FLORAL





TILE SIZE 60X60CM

SURFACE CARVING FINISH

PALMERA





SPARROW





SWEDISH RETRO





VERBENA BLUE





ZOFFANY GREEN





ZOFFANY RED



TECHNICAL SPECIFICATION

| CHARACTERISTIC | STANDARD AS PER ISO-13006 / En14411 GROUP Bla | VALUE | TEST METHOD |
|---|---|---------------------------|--------------|
| REGULATORY PROPERTIES | | | |
| Deviation in length & width | ± 0.5% | ± 0.3% | ISO-10545-2 |
| Deviation in thickness | ± 0.5% | ± 4.0% | ISO-10545-2 |
| Straightness in side | ± 0.5% | ± 0.1% | ISO-10545-2 |
| Rectangularity | ± 0.5% | ± 0.1% | ISO-10545-2 |
| Surface flatness | ± 0.5% | ± 0.2% | ISO-10545-2 |
| Color difference | Unlterned | No change | ISO-10545-16 |
| Glossiness | As per mfg. | Min 90 % | GLOSSO METER |
| STRUCTURAL PROPERTIES | | | |
| Water absorption | < 0.50% | < 0.05% | ISO-10545-3 |
| Apparent density | > 2.0 g/cc | > 2.10 g/cc | DIN 51082 |
| MASSIVE MECHANICAL PROPERTIES | | | |
| Modulus of repture | Min. 35 N/mm² | Min. 40 N/mm² | ISO-10545-4 |
| Breaking strength | Min. 1300 N | Min. 1800 N | ISO-10545-4 |
| Impact resistance | As per mfg. | Min. 0.55 | ISO-10545-5 |
| SURFACE MECHANICAL PROPERTIES | | | |
| Resistance to surface abrasion (PEI RATING) | As per mfg. | Min. Class-4 | ISO-10545-7 |
| MOH's hardness | As per mfg. | Min. 5 | EN 101 |
| THERMO HYGROMRTRIC PROPERTIES | | | |
| Frost resistance | No damage | No damage | ISO-10545-12 |
| Thermal shock resistance | No damage | No damage | ISO-10545-9 |
| Moisture expansion | Nill | Nill | ISO-10545-10 |
| Thermal expansion(COE) | Max. 9.0x10 ⁻⁶ | Max. 6.5x10 ⁻⁶ | ISO-10545-8 |
| Crazing resistance | As per mfg. | Min. 10 Cycle | ISO-10545-11 |
| CHEMICAL PROPERTIES | | | |
| Chemical resistance | No damage | No damage | ISO-10545-13 |
| Stain resistance | Min. Class 3 | Class 5 | ISO-10545-14 |
| SEFETY PROPERTIES | | | |
| Slip resistance | As per mfg. | > 0.40 | ISO-10545-17 |
| Fire resistance | As per mfg. | Fireproof | N.A. |
| Lead & Cafmium given off by glazes tiles | As per mfg. | Does not yield Pb & Cd | ISO-10545-15 |

PACKING DETAILS

| SIZE | THICKNESS | PIECES / BOX | AREA / BOX | WEIGHT / BOX |
|-----------|--------------|--------------|---------------|--------------|
| 600x600mm | 9mm (Approx) | 4 pcs. | 1.44 sq. mtr. | 28.5 kgs |